


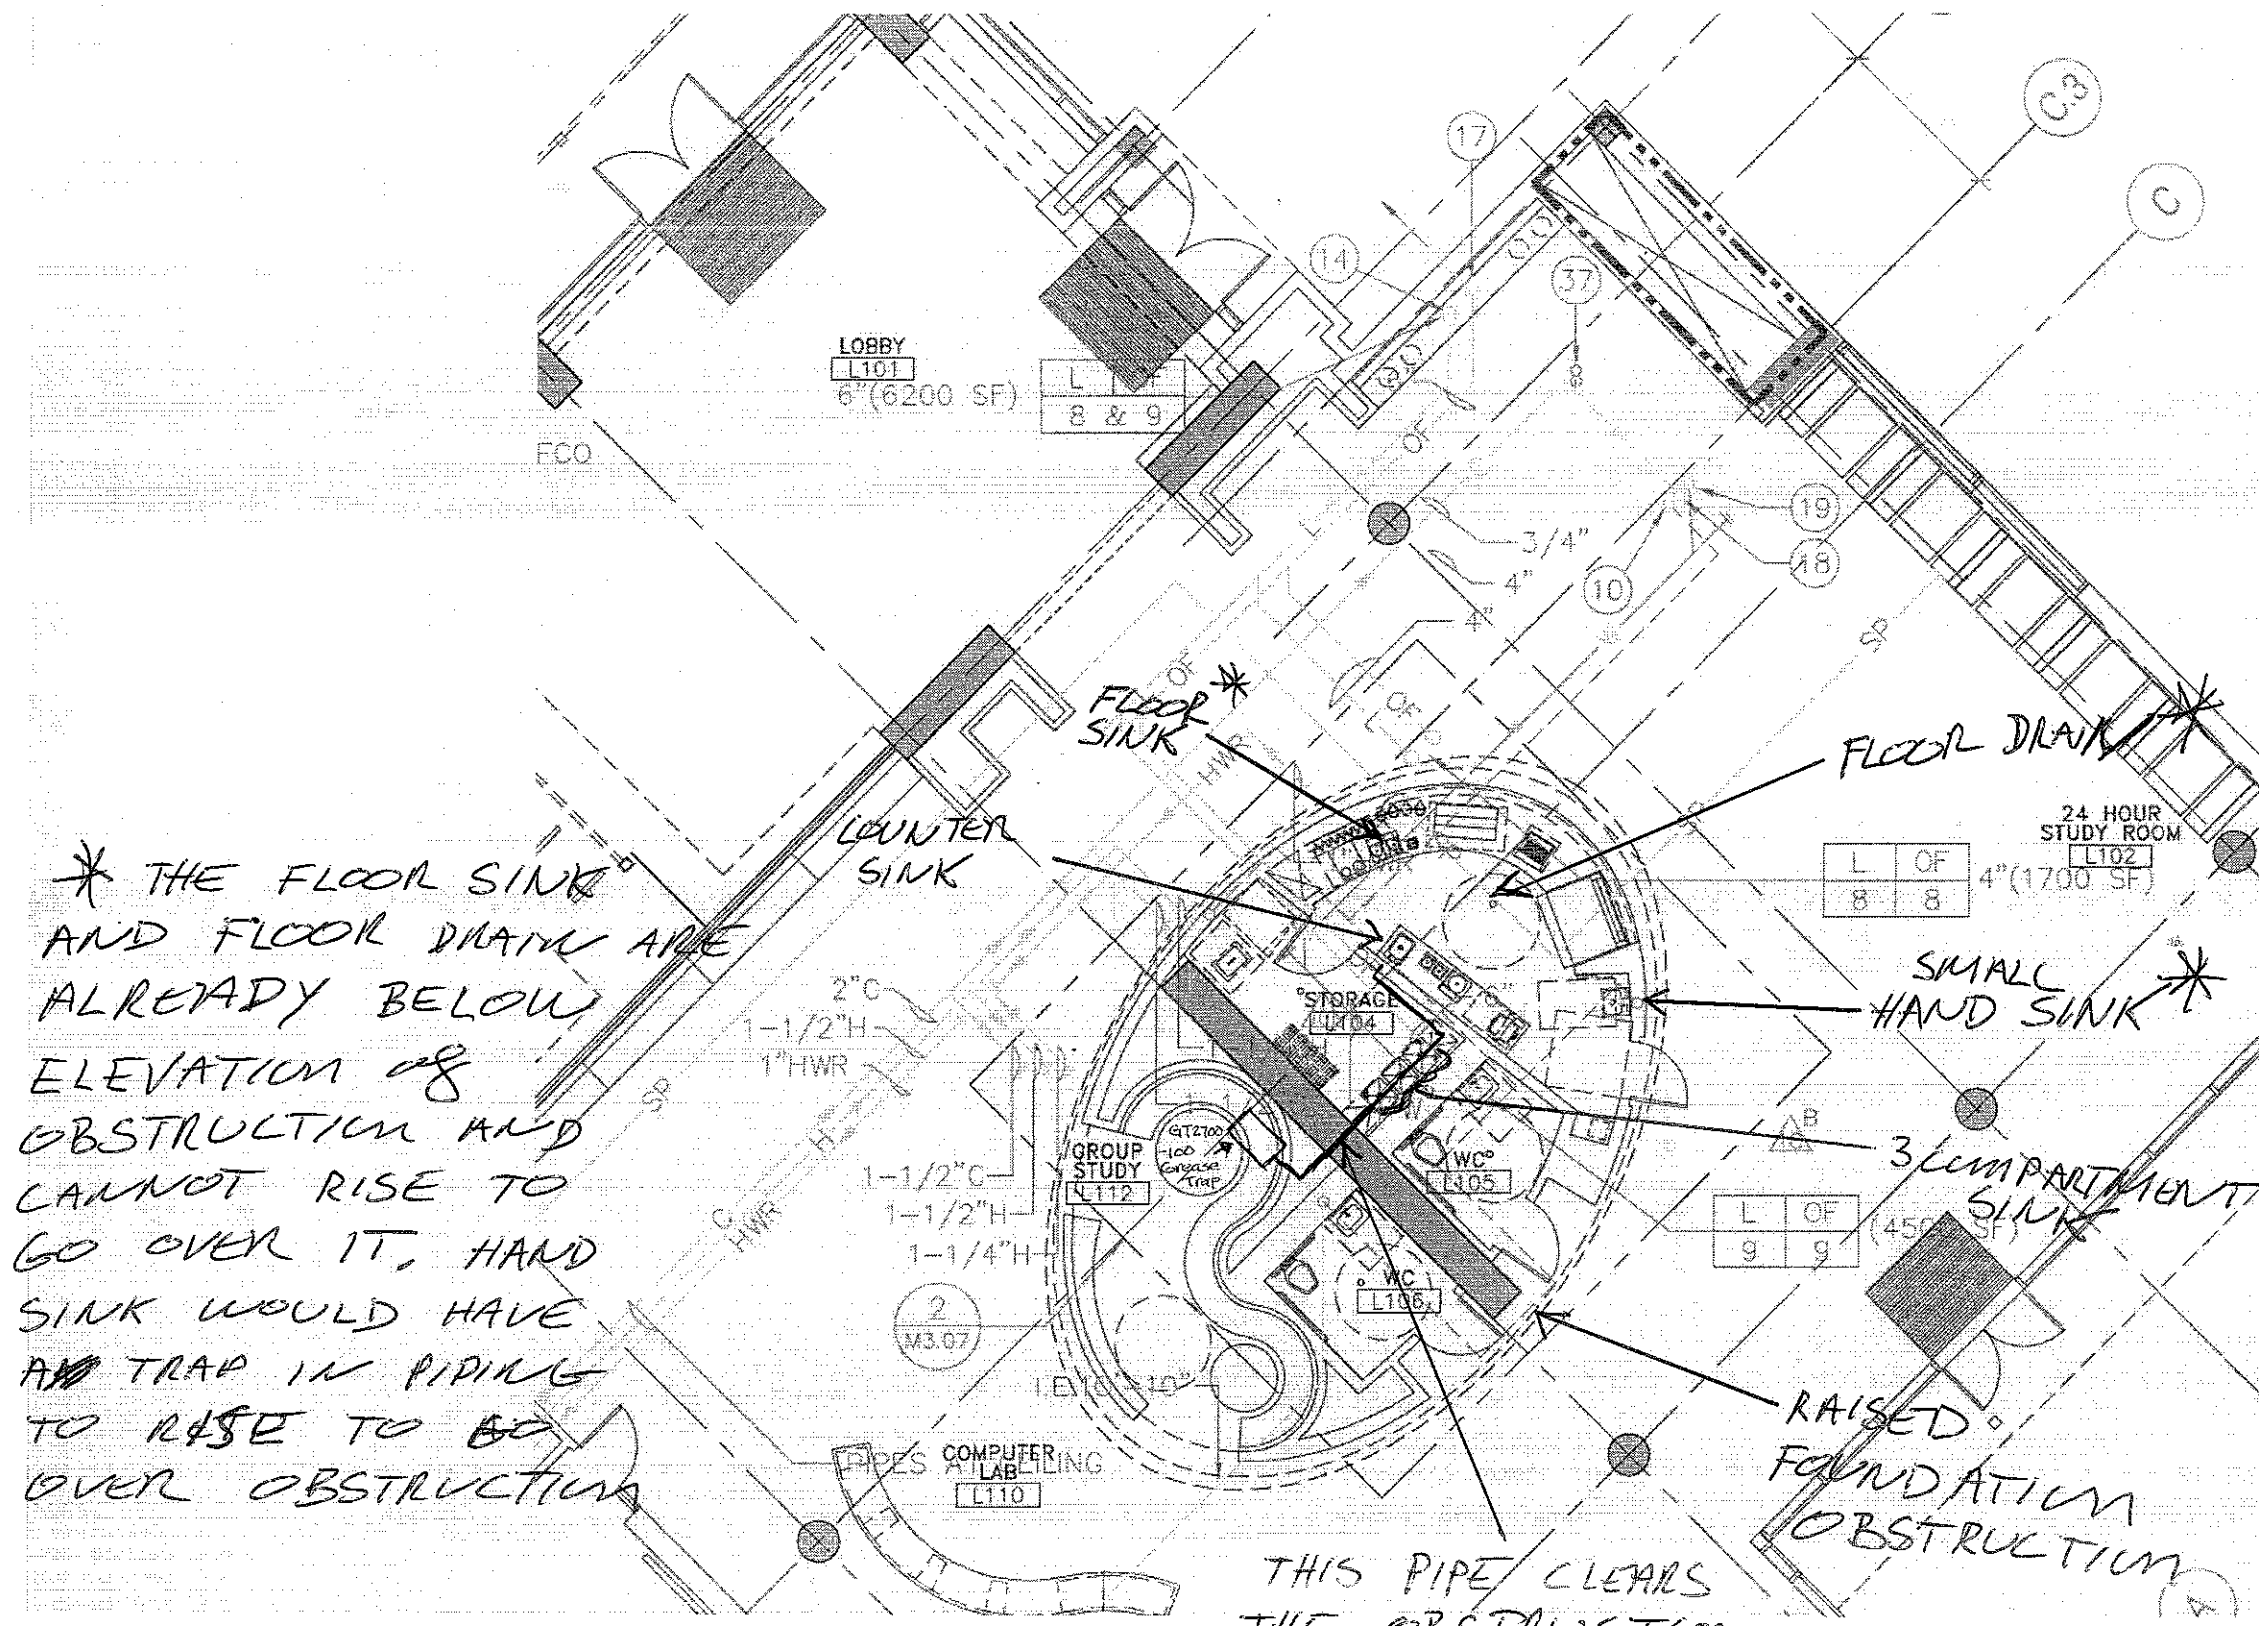

GT2700 Grease Interceptor
TAG

GT2700 Grease Interceptor
TAG

GT2700-4 through GT2700-50 GT2700-75 & GT2700-100

Model Number	Inlet/Outlet No-Hub	Flow Rate GPM	Capacity Grease Lbs (kg)	Dimension in Inches			
				C	D/C	F	G
GT2700-4	2 (51)	4 (15)	8 (4)	10 (254)	7-1/4 (184)	15-7/8 (403)	9-7/8 (251)
GT2700-7	2 (51)	7 (26)	14 (6)	11-1/8 (293)	8-1/2 (216)	17-1/4 (438)	11-7/8 (302)
GT2700-10	2 (51)	10 (38)	20 (9)	11-3/8 (296)	9-1/4 (238)	19-1/4 (493)	14 (356)
GT2700-15	2 (51)	15 (57)	30 (14)	13-3/8 (340)	9-3/8 (238)	21-1/4 (540)	18-3/4 (473)
GT2700-20	3 (76)	20 (76)	40 (18)	13-3/8 (340)	11-3/4 (296)	24-1/8 (613)	17-1/4 (438)
GT2700-25	3 (76)	25 (94)	50 (23)	17 (432)	12-7/16 (318)	28-1/8 (714)	19-7/8 (505)
GT2700-35	4 (102)	35 (132)	70 (32)	18-3/4 (476)	14-3/16 (360)	28 (711)	22-1/2 (572)
GT2700-50	4 (102)	50 (188)	100 (45)	21-1/2 (546)	16 (406)	29-7/8 (759)	24-1/2 (622)
GT2700-75	4 (102)	75 (283)	150 (68)	22-3/4 (583)	18-1/2 (470)	36 (914)	29-5/8 (747)
GT2700-100	4 (102)	100 (376)	200 (91)	27 (689)	23 (584)	42-3/4 (1088)	33-5/8 (854)

GT2700 Grease Interceptor
Recommended for removing and retaining grease from wastewater in kitchen and restaurant areas where food is prepared. Grease trap is corrosion-resistant coated fabricated steel with no-hub connections, flow offing baffle, integral trap, and vented inlet flow control device.

OPTIONS
-JP2700 6 (152) Extension

Sizes 4 - 50 Sizes 20 G.P.M. - 50 G.P.M.

JUPAN LIGHT COMMERCIAL PLUMBING PRODUCTS • 2640 South Work Street • Falconer, NY 14733
Phone: 1-800-933-5403 • Fax: 716-353-3126 • World Wide Web: www.jup.com

Rev. B Date: 12/20/11 C.N. No. 122581
Dwg No. 63802 Product No. GT2700